

WAAS CH 56428 W32A	APP CRS 317°	Rwy Idg THRE 75 Apt Elev 79	4999
--	------------------------	--	-------------



RNAV (GPS) RWY 32

MONROE RGNL (MLU)

▽ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA.

MISSED APPROACH: Climb to 3000 direct ZUNTU on track 319° to FLESH and hold.

ATIS 125.05	MONROE APP CON * 126.9 307.9	MONROE TOWER * 118.9 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95
-----------------------	--	---	-------------------------	---------------------------	-------------------------

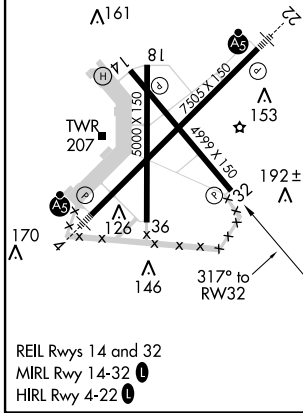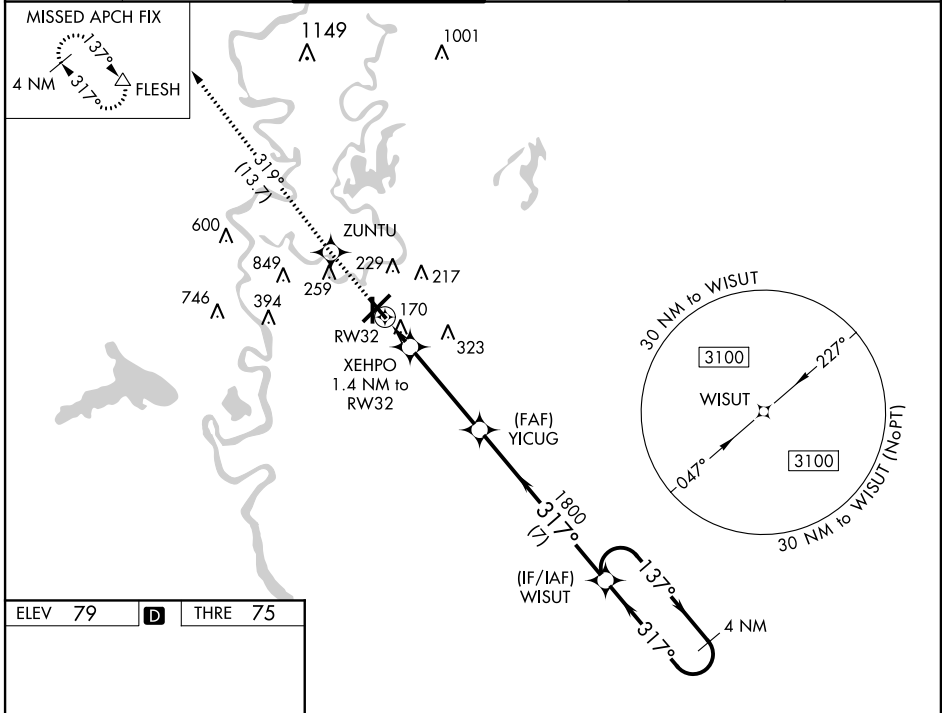

ELEV 79	D	THRE 75			
3000	ZUNTU	tr 319°	FLESH	WISUT	4 NM Holding Pattern
*LNAV only.		XEHPO 1.4 NM to RW32	YICUG 1800	WISUT 3100	GS 3.00° TCH 50
RW32		*560	1800	317°	← 317°
1.4 NM		3.9 NM	7 NM		

CATEGORY	A	B	C	D
LPV DA	325-3/4		250 (300-3/4)	
LNAV/VNAV DA	353-3/4		278 (300-3/4)	
LNAV MDA	460-3/4 385 (400-3/4)		460-1/8 385 (400-1/8)	
CIRCLING	580-1 501 (600-1)		620-1/2 640-2 541 (600-1/2) 561 (600-2)	

SC-4, 07 FEB 2013 to 07 MAR 2013

SC-4, 07 FEB 2013 to 07 MAR 2013