


WAAS CH 56410 W04A	APP CRS 042°	Rwy Idg 7505 THRE 76 Apt Elev 79
--	------------------------	---

RNAV (GPS) RWY 4



MONROE RGNL (MLU)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below ASR -15°C (5°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.		MALSR 	MISSED APPROACH: Climb to 3000 direct LURBY and hold.		
ATIS 125.05	MONROE APP CON * 126.9 307.9	MONROE TOWER * 118.9 (CTAF) 257.8	GND CON 121.9	CLNC DEL 121.65	UNICOM 122.95

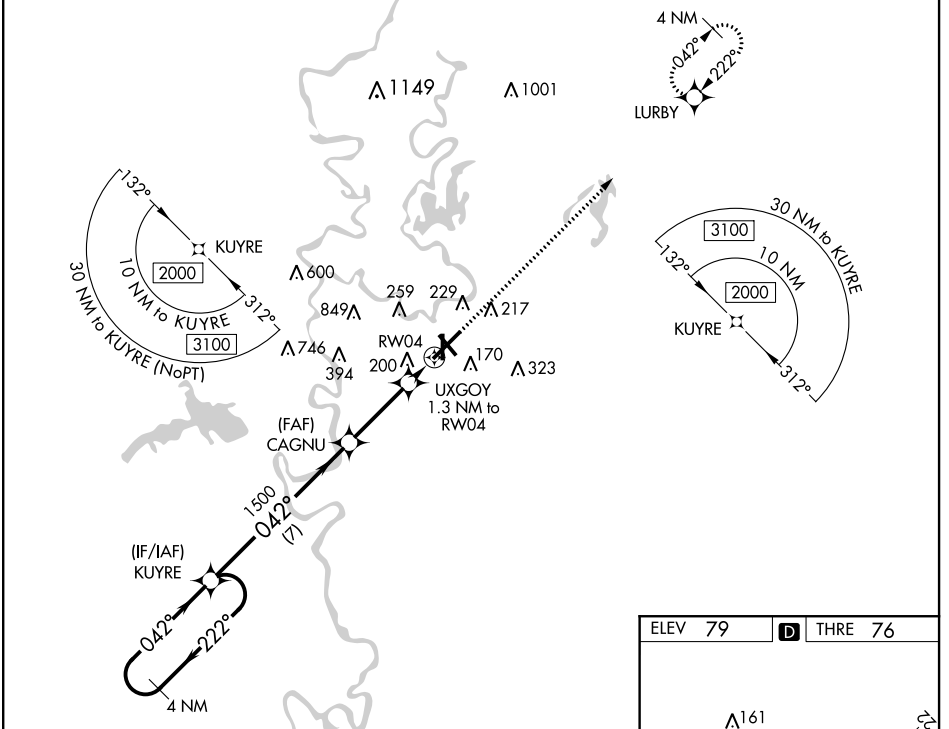

SC-4, 07 FEB 2013 to 07 MAR 2013

SC-4, 07 FEB 2013 to 07 MAR 2013

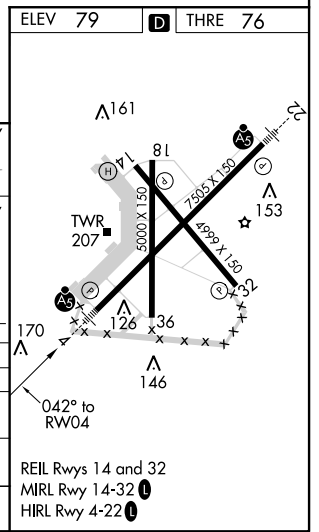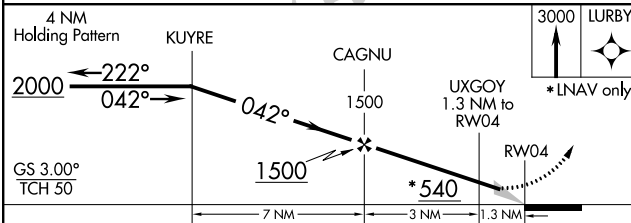

CATEGORY	A	B	C	D
LPV DA		276/24	200 (200-½)	
LNAV/VNAV DA		381/24	305 (400-½)	
LNAV MDA	460/24	384 (400-½)	460/35	384 (400-¾)
CIRCLING	580-1	501 (600-1)	620-1½ 541 (600-1½)	640-2 561 (600-2)