

MERLOT ONE DEPARTURE

ATIS
124.05
GND CON
121.7
CLNC DEL
127.85
NAPA TOWER★
118.7 (CTAF) 257.8
OAKLAND CENTER
127.8 353.5

TAKEOFF MINIMUMS

Rwy 6: Standard with minimum climb of 430' per NM to 1600.
Rwy 18L: Standard with minimum climb of 320' per NM to 1500.
Rwy 18R: Standard with minimum climb of 330' per NM to 1600.
Rwy 24: Standard with minimum climb of 250' per NM to 1300.
Rwy 36L: Standard with minimum climb of 420' per NM to 2900.
Rwy 36R: Standard with minimum climb of 460' per NM to 3000.

RED BLUFF
115.7 RBL
Chan 104
N40°05.93'
W122°14.18'
L-2, H-3

WILLIAMS
114.4 ILA
Chan 91
N39°04.27'-W112°01.63'
L-2-3

MENDOCINO
112.3 ENI
Chan 70
N39°03.19'
W123°16.46'
L-2, H-3

SANTA ROSA
113.0 STS
Chan 77
N38°30.49'
W122°48.64'
L-2-3

SACRAMENTO
115.2 SAC
Chan 99
N38°26.62'-W121°33.10'
L-2-3, H-3

LINDEN
114.8 LIN
Chan 95
N38°04.48'
W121°00.23'
L-2-3, H-3

SCAGGS ISLAND
112.1 SGD
Chan 58
N38°10.76'-W122°22.39'
L-2-3

POINT REYES
113.7 PYE
Chan 84
N38°04.79'
W122°52.07'
L-2-3, H-3

CONCORD
117.0 CCR
Chan 117
N38°02.70'-W122°02.71'
L-2-3

MANTECA
116.0 ECA
Chan 107
N37°50.02'
W121°10.28'
L-2-3, H-3


SAUSALITO
116.2 SAU
Chan 109
N37°51.32'
W122°31.37'
L-2-3

OAKLAND
116.8 OAK
Chan 115
N37°43.56'-W122°13.42'
L-2-3, H-3

NOTE: RADAR required.

SW-2, 07 FEB 2013 to 07 MAR 2013

SW-2, 07 FEB 2013 to 07 MAR 2013

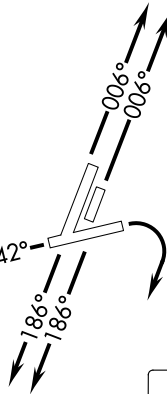

(NARRATIVE ON FOLLOWING PAGE)
(NOTES CONTINUED ON FOLLOWING PAGE)

NOTE: Chart not to scale.