KRSTA ONE DEPARTURE (RNAV)

ATIS 135.1
CLNC DEL 126.05
GND CON
121.9 348.6
NASHVILLE TOWER
118.6 257.8
NASHVILLE DEP CON
118.4 360.7 (019°-199°)
119.35 372.0 (200°-018°)

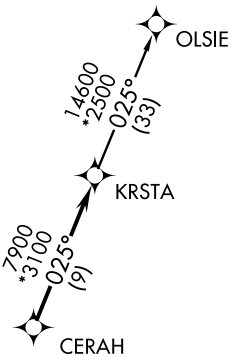

NOTE: Transponder code will be issued via PDC or Nashville clearance delivery.
NOTE: If unable to accept climb rates, advise ATC on initial contact.
NOTE: RNAV-1
NOTE: DME/DME/IRU or GPS required.
NOTE: Radar required.

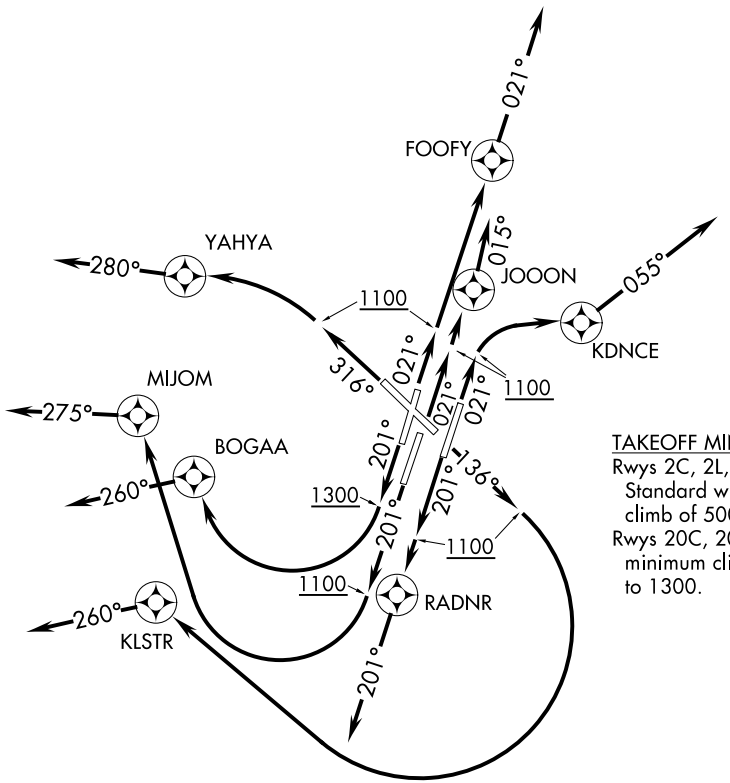

TAKEOFF MINIMUMS:
Rwys 2C, 2L, 2R, 13, 20L, 31: Standard with minimum climb of 500' per NM to 1100.
Rwys 20C, 20R: Standard with minimum climb of 500' per NM to 1300.

(NARRATIVE ON FOLLOWING PAGE)

NOTE: Chart not to scale.

SE-1, 07 FEB 2013 to 07 MAR 2013
SE-1, 07 FEB 2013 to 07 MAR 2013