NDB RWY 25

CINCINNATI MUNI AIRPORT-LUNKEN FIELD (LUK)

NDB LUK	APP CRS	Rwy Idg	5128
335	231°	THRE	475
		Apt Elev	483

V A Circling to Rwy 3L and 7 NA at night. Visibility reduction by helicopters NA. When local altimeter setting not received, use Cincinnati/Northern Kentucky Intl altimeter setting and increase all MDA 100 feet, increase S-25 Cat B and Circling Cats B/C visibility ¼ mile, S-25 Cats C/D visibility ½ mile. When VGSI inop, Straight-In/Circling Rwy 25 procedure NA at night.

MISSED APPROACH: Climbing left turn to 2500 on heading 185° and CVG R-109 to CALIF INT and hold, continue climb-in-hold to 2600.

ATIS	CINCINNATI APP CON	LUNKEN TOWER ★	GND CON	CLNC DEL	CINCINNATI CLNC DEL	UNICOM
120.25	121.0 257.725	118.7 (CTAF) L 257.8	121.9	121.9	124.9 (when tower closed)	122.95

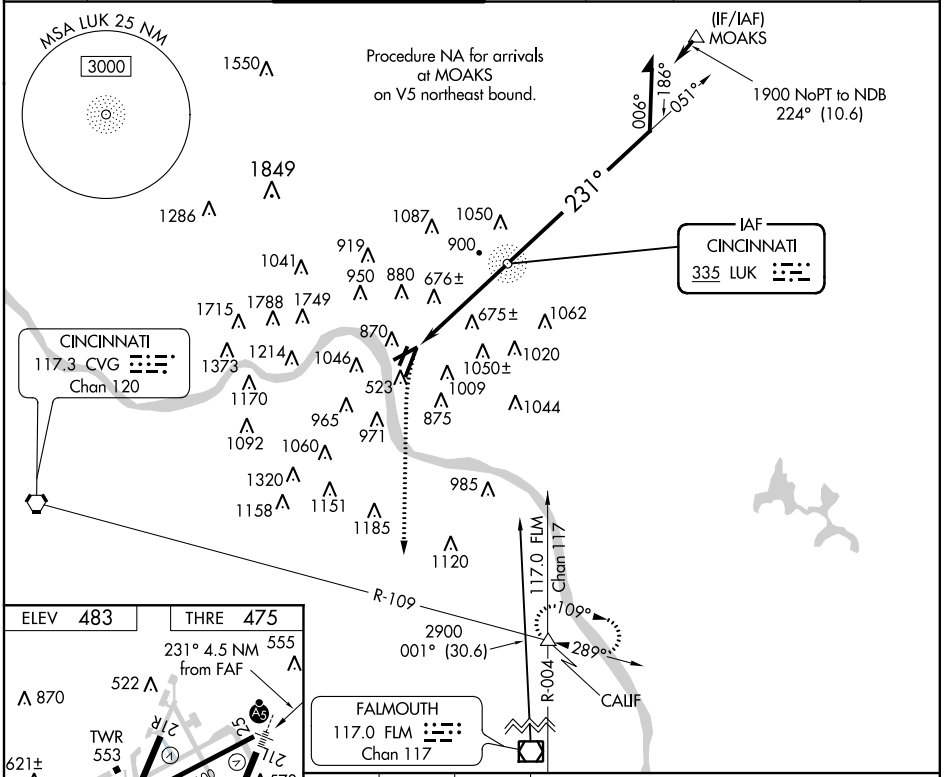

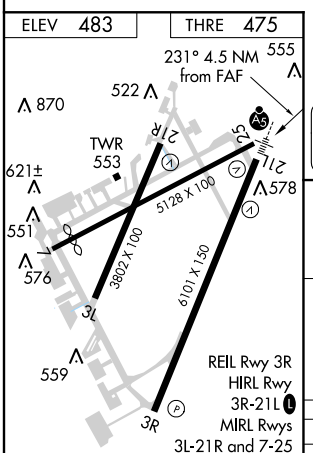

FAF to MAP 4.5 NM					
Knots	60	90	120	150	180
Min:Sec	4:30	3:00	2:15	1:48	1:30

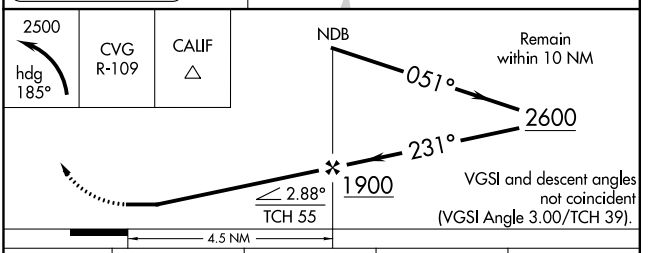

CATEGORY	A	B	C	D
S-25	1420-1¼	945 (1000-1¼)	1420-2½	945 (1000-2½)
CIRCLING	1420-1¼	937 (1000-1¼)	1420-2¾ 937 (1000-2¾)	1420-3 937 (1000-3)

EC-2, 07 FEB 2013 to 07 MAR 2013
EC-2, 07 FEB 2013 to 07 MAR 2013