

LOC/DME I-JJM 110.55 Chan 42 (Y)	APP CRS 349°	Rwy Idg 7800 THRE 472 Apt Elev 501
--	------------------------	--


ILS or LOC RWY 35R

LOUISVILLE INTL-STANDIFORD FIELD (SDF)

Simultaneous approach authorized with Rwy 35L. Circling to Rwy 11 NA at night. For inoperative ALSF-2, increase S-LOC 35R HOSTO fix minimums Cat C and D visibility to RVR 5000.

MISSED APPROACH: Climb to 3000 on heading 349° and ABB VORTAC R-196 to ABB VORTAC and hold.



ATIS 118.725	LOUISVILLE APP CON 132.075 327.0 (EAST) 123.675 327.0 (WEST)	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8
------------------------	--	--	-------------------------------	--------------------------------

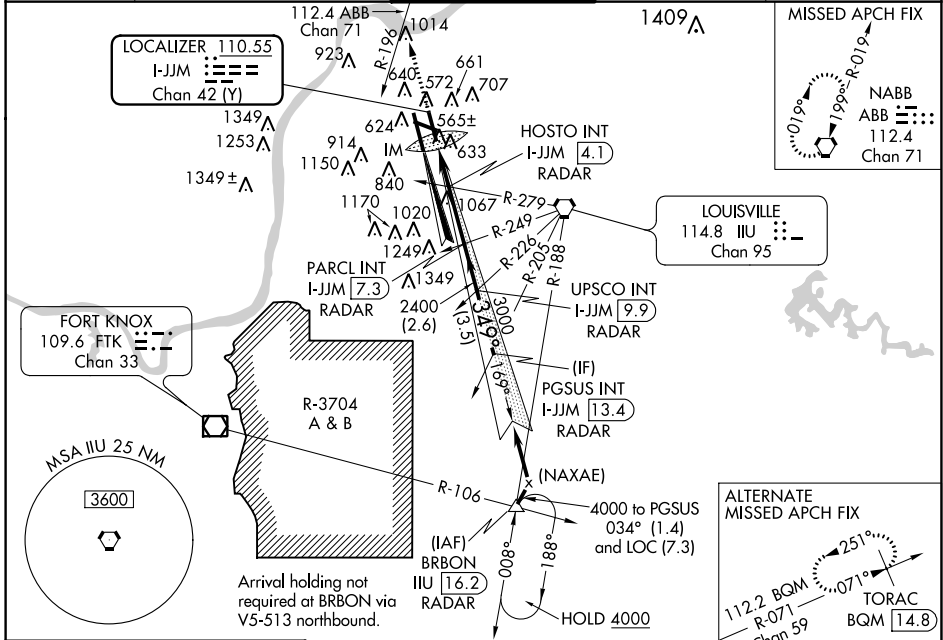

SE-1, 07 FEB 2013 to 07 MAR 2013

SE-1, 07 FEB 2013 to 07 MAR 2013

ELEV 501	D THRE 472
----------	-------------------

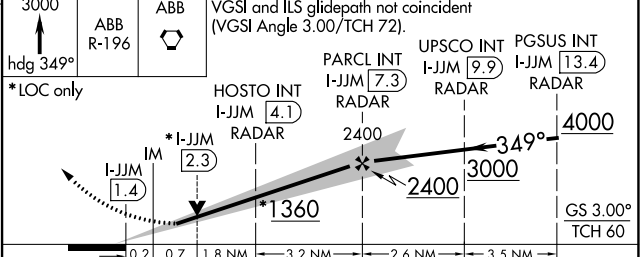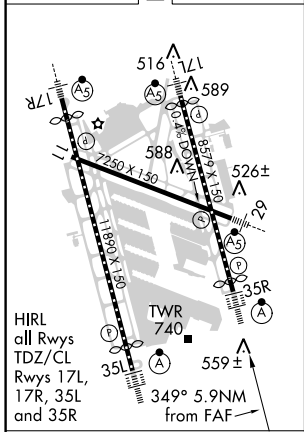

CATEGORY	A	B	C	D
S-ILS 35R	672/18 200 (200-1/2)			
S-LOC 35R	1360/40	888 (900-3/4)	1360-2	888 (900-2)
CIRCLING	1360-1 1/4	859 (900-1 1/4)	1360-2 1/2	1360-2 3/4
	859 (900-2 1/2) 859 (900-2 3/4)			
HOSTO MINIMUMS				
S-LOC 35R	820/24	348 (400-1/2)	820/30	348 (400-3/4)
CIRCLING	1040-1	1140-1	1140-1 3/4	1140-2
	539 (600-1)	639 (700-1)	639 (700-1 3/4)	639 (700-2)